

[Announcer Series Series](#)

AN454\_16V






**Specifications**

<b>Mounting</b>	Bracket Mount
<b>Operating Mode</b>	Voice Message: 16 Custom Recorded Messages
<b>Operating Voltage</b>	10-29 Vdc
<b>Operating Frequency</b>	300Hz to 10Khz
<b>Typical Operating Current</b>	0 mA at 10 Vdc 250 mA at 29 Vdc
<b>Typical Sound Pressure</b>	0 ±5 dB(A) at 10 Vdc at 24 inches (61 cm), at 25°C 115 ±5 dB(A) at 29 Vdc at 24 inches (61 cm), at 25°C
<b>Termination</b>	Wires
<b>Operating Temperature</b>	-20_C to +65_C
<b>Storage Temperature</b>	-40_C to +85_C
<b>Surge Voltage</b>	20% over maximum rated voltage for less than 5 minutes
<b>Reverse Voltage Protection</b>	To the maximum operating voltage
<b>Construction Materials</b>	AN454 is designed for wet and damp environments
<b>Life Expectancy</b>	10 years under normal operating conditions.
<b>Warranty</b>	For a period of one year from the date of manufacture under normal operating conditions.
<b>Notes</b>	This product is not intended as a life safety device.

**Terms and Conditions of Sale** [Link here](#)

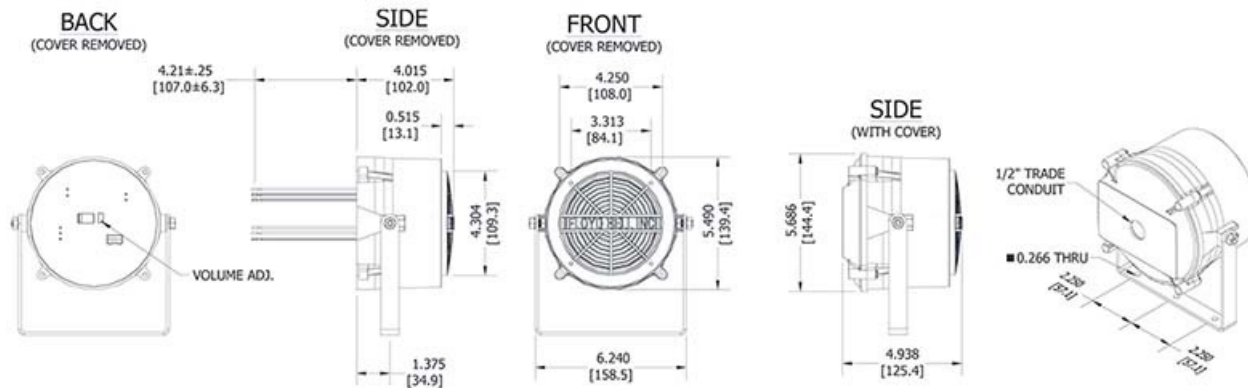

DIMENSIONS ARE IN INCHES [ mm ], TOLERANCES ARE ±0.03in [±0.76mm] UNLESS OTHERWISE SPECIFIED.

