


[Announcer Series Series](#)

AN454_8V






Specifications

| | |
|-----------------------------------|--|
| Mounting | Bracket Mount |
| Operating Mode | Voice Message: 8 Custom Recorded Messages |
| Operating Voltage | 10-29 Vdc |
| Operating Frequency | 300Hz to 10Khz |
| Typical Operating Current | 0 mA at 10 Vdc 250 mA at 29 Vdc |
| Typical Sound Pressure | 0 ±5 dB(A) at 10 Vdc at 24 inches (61 cm), at 25°C 115 ±5 dB(A) at 29 Vdc at 24 inches (61 cm), at 25°C |
| Termination | Wires |
| Operating Temperature | -20_C to +65_C |
| Storage Temperature | -40_C to +85_C |
| Surge Voltage | 20% over maximum rated voltage for less than 5 minutes |
| Reverse Voltage Protection | To the maximum operating voltage |
| Construction Materials | AN454 is designed for wet and damp environments |
| Life Expectancy | 10 years under normal operating conditions. |
| Warranty | For a period of one year from the date of manufacture under normal operating conditions. |
| Notes | This product is not intended as a life safety device. |

Terms and Conditions of Sale [Link here](#)

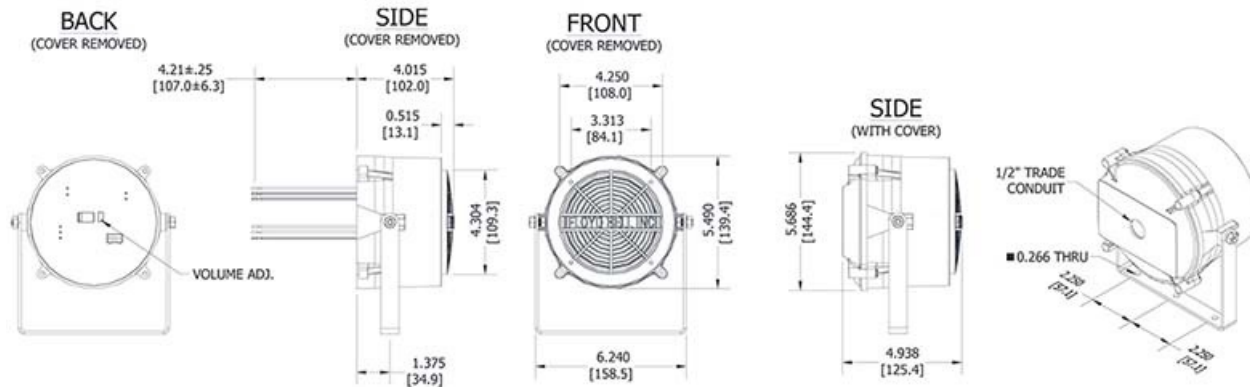

DIMENSIONS ARE IN INCHES [mm], TOLERANCES ARE ±0.03in [±0.76mm] UNLESS OTHERWISE SPECIFIED.