

[Announcer Series Series](#)

AN454W_16VUSB






Specifications

Mounting	Bracket Mount
Operating Mode	Voice Message: 16 Custom Recorded Messages
Operating Voltage	10-29 Vdc
Operating Frequency	300Hz to 10Khz
Typical Operating Current	0 mA at 10 Vdc 250 mA at 29 Vdc
Typical Sound Pressure	0 ±5 dB(A) at 10 Vdc at 24 inches (61 cm), at 25°C 115 ±5 dB(A) at 29 Vdc at 24 inches (61 cm), at 25°C
Termination	Wires
Operating Temperature	-20_C to +65_C
Storage Temperature	-40_C to +85_C
Surge Voltage	20% over maximum rated voltage for less than 5 minutes
Reverse Voltage Protection	To the maximum operating voltage
Construction Materials	AN454 is designed for wet and damp environments
Life Expectancy	10 years under normal operating conditions.
Warranty	For a period of one year from the date of manufacture under normal operating conditions.
Notes	This product is not intended as a life safety device.

Terms and Conditions of Sale [Link here](#)

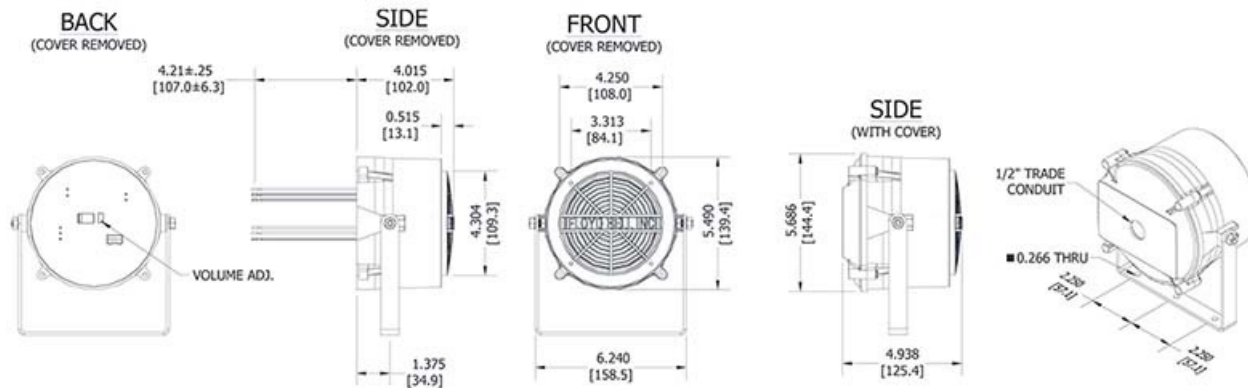

DIMENSIONS ARE IN INCHES [mm], TOLERANCES ARE ±0.03in [±0.76mm] UNLESS OTHERWISE SPECIFIED.