

## M-80/M-100 Series

M-80MB(F)




## Specifications

<b>Mounting</b>	PC Mount
<b>Operating Mode</b>	Medium Loud Fast Beep Tone
<b>Operating Voltage</b>	5-30 Vdc
<b>Operating Frequency</b>	2900±250 Hz
<b>Typical Operating Current</b>	2 mA at 5 Vdc 10 mA at 30 Vdc
<b>Termination</b>	PC Pins
<b>Operating Temperature</b>	-20_C to +65_C
<b>Storage Temperature</b>	-40_C to +85_C
<b>Surge Voltage</b>	20% over maximum rated voltage for less than 5 minutes
<b>Reverse Voltage Protection</b>	To the maximum operating voltage
<b>Notes</b>	This product is not intended as a life safety device.

**Terms and Conditions of Sale** [Link here](#)

□



More Information




[UL Recognized](#)



RoHS Compliant

Dimensions

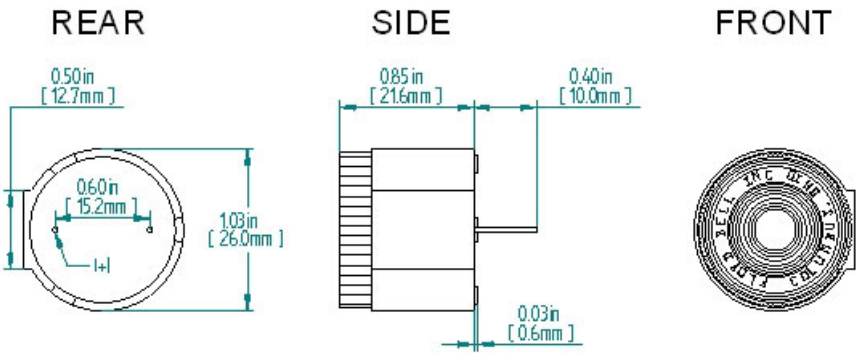

TOLE RANCES ARE ±0.03in [±0.76mm] UNLESS OTHERWISE SPECIFIED