

[Announcer Series Series](#)

AN150Q





**Dimensions**

[More Information](#)



**Specifications**

<b>Mounting</b>	Panel Mount
<b>Operating Mode</b>	Voice Message: 3 Custom Recorded Messages
<b>Operating Voltage</b>	9-30 Vdc
<b>Typical Operating Current</b>	0 mA at 9 Vdc
	250 mA at 30 Vdc
<b>Typical Sound Pressure</b>	0 ±5 dB(A) at 9 Vdc at 24 inches (61 cm), at 25°C
	90 ±5 dB(A) at 30 Vdc at 24 inches (61 cm), at 25°C
<b>Termination</b>	Quick Connect Blades
<b>Termination Strength</b>	Pull test with a maximum of 22 pounds (10 kg) load
<b>Operating Temperature</b>	-20_C to +65_C
<b>Storage Temperature</b>	-40_C to +85_C
<b>Surge Voltage</b>	20% over maximum rated voltage for less than 5 minutes

<b>Reverse Voltage Protection</b>	To the maximum operating voltage
<b>Construction Materials</b>	Plastic _NORYL_ N-190, Flame Retardant UL 94-VO, Black Potting- 2 parts epoxy resin or silicone, black
<b>Gasket</b>	Gasket (sold separately) 0.062" thick, 60 Durometer Neoprene
<b>Construction Materials</b>	ASTM B117 Certified - Withstands exposure to salt spray for 300 hours Humidity- 95% relative humidity at +40_C continuously for 100 hours. Vibration- Withstands vibration between 0 and 55 Hz. on all axes.
<b>Life Expectancy</b>	10 years under normal operating conditions.
<b>Warranty</b>	For a period of two years from the date of manufacture under normal operating conditions.
<b>Notes</b>	This product is not intended as a life safety device.
<b>Terms and Conditions of Sale</b> <a href="#">Link here</a>	

S1	S2	Output
On	Off	Msg1
Off	On	Msg2
On	On	Msg3

## DIMENSIONS


### PANEL MOUNTING




FITS PANELS UP-TO  
0.25 (6.3) THICK

### REAR


Note:  
Common input  
marked in blue

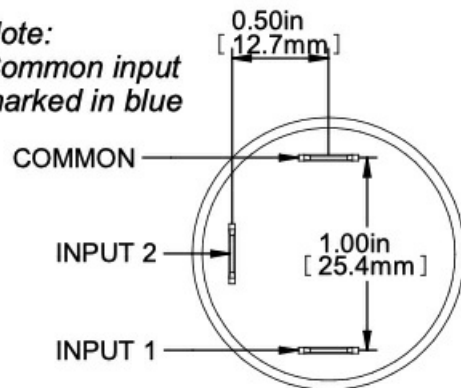


### SIDE

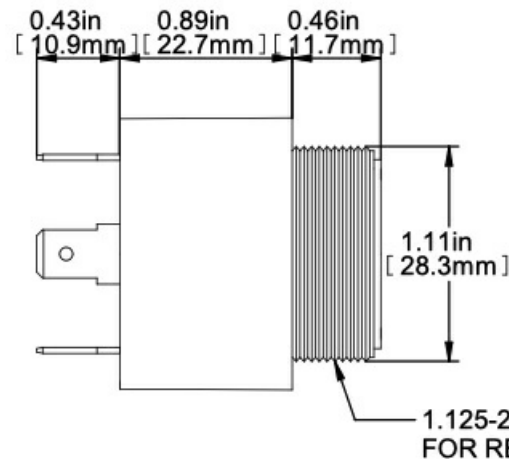

### RING

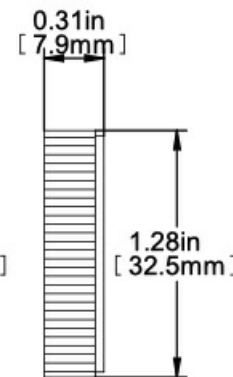

### FRONT

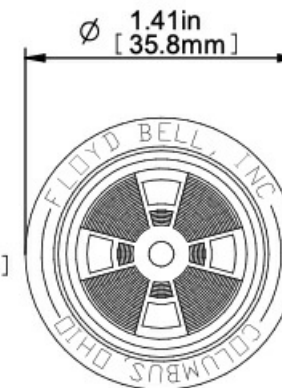

TOLERANCES ARE  $\pm 0.03\text{in}$  [ $\pm 0.76\text{mm}$ ] UNLESS OTHERWISE SPECIFIED

PANEL MOUNTING



FITS PANELS UP TO  
0.25in [6.35mm] THICK

