


## M-80/M-100 Series

M-80MB(S)

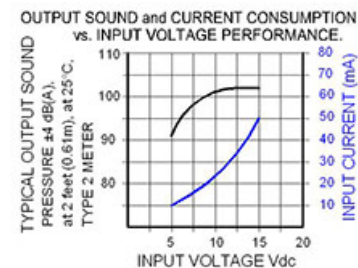

## Specifications

|                                   |                                                        |
|-----------------------------------|--------------------------------------------------------|
| <b>Mounting</b>                   | PC Mount                                               |
| <b>Operating Mode</b>             | Medium Loud Slow Beep Tone                             |
| <b>Operating Voltage</b>          | 5-30 Vdc                                               |
| <b>Operating Frequency</b>        | 2900±250 Hz                                            |
| <b>Typical Operating Current</b>  | 2 mA at 5 Vdc<br>10 mA at 30 Vdc                       |
| <b>Termination</b>                | PC Pins                                                |
| <b>Operating Temperature</b>      | -20_C to +65_C                                         |
| <b>Storage Temperature</b>        | -40_C to +85_C                                         |
| <b>Surge Voltage</b>              | 20% over maximum rated voltage for less than 5 minutes |
| <b>Reverse Voltage Protection</b> | To the maximum operating voltage                       |
| <b>Notes</b>                      | This product is not intended as a life safety device.  |

**Terms and Conditions of Sale** [Link here](#)


□

More Information

 [UL Recognized](#)

 **RoHS** Compliant

Dimensions

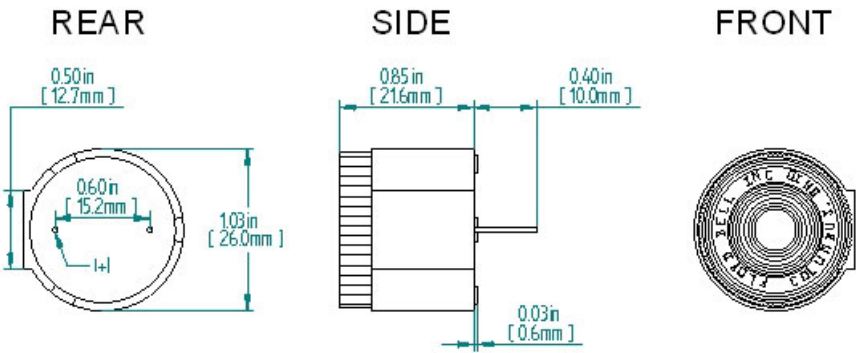

TOLE RANCES ARE  $\pm 0.03$  in [  $\pm 0.76$  mm ] UNLESS OTHE RWISE SPEC FIED