




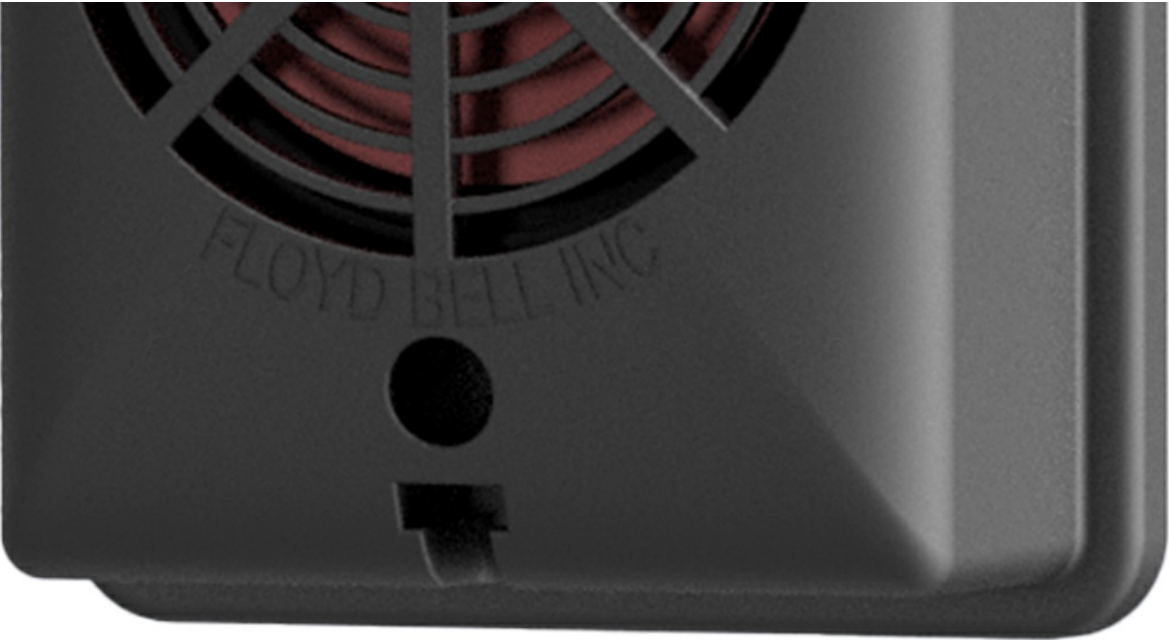

More Information

 RoHS Compliant

Dimensions

Specifications

Mounting	Box Mount
Operating Mode	Voice Message: 16 Custom Recorded Messages
Operating Voltage	9-30 Vdc
Operating Frequency	300Hz to 10Khz
Typical Operating Current	0 mA at 9 Vdc 250 mA at 30 Vdc
Typical Sound Pressure	0 ±5 dB(A) at 9 Vdc at 24 inches (61 cm), at 25°C 105 ±5 dB(A) at 30 Vdc at 24 inches (61 cm), at 25°C
Termination	Wires
Operating Temperature	-20_C to +65_C
Storage Temperature	-40_C to +85_C
Surge Voltage	20% over maximum rated voltage for less than 5 minutes
Reverse Voltage Protection	To the maximum operating voltage
Construction Materials	Plastic _NORYL_ N-190, Flame Retardant UL 94-VO, Black
Construction Materials	AN200 is designed for wet and damp environments
Life Expectancy	10 years under normal operating conditions.

