

[Announcer Series Series](#)

AN150Q





Dimensions

[More Information](#)



Rohs Compliant

Specifications

Mounting	Panel Mount
Operating Mode	Voice Message: 3 Custom Recorded Messages
Operating Voltage	9-30 Vdc
Typical Operating Current	0 mA at 9 Vdc
	250 mA at 30 Vdc
Typical Sound Pressure	0 ±5 dB(A) at 9 Vdc at 24 inches (61 cm), at 25°C
	90 ±5 dB(A) at 30 Vdc at 24 inches (61 cm), at 25°C
Termination	Quick Connect Blades
Termination Strength	Pull test with a maximum of 22 pounds (10 kg) load
Operating Temperature	-20_C to +65_C
Storage Temperature	-40_C to +85_C
Surge Voltage	20% over maximum rated voltage for less than 5 minutes

Reverse Voltage Protection	To the maximum operating voltage
Construction Materials	Plastic _NORYL_ N-190, Flame Retardant UL 94-VO, Black Potting- 2 parts epoxy resin or silicone, black
Gasket	Gasket (sold separately) 0.062" thick, 60 Durometer Neoprene
Construction Materials	ASTM B117 Certified - Withstands exposure to salt spray for 300 hours Humidity- 95% relative humidity at +40_C continuously for 100 hours. Vibration- Withstands vibration between 0 and 55 Hz. on all axes.
Life Expectancy	10 years under normal operating conditions.
Warranty	For a period of two years from the date of manufacture under normal operating conditions.
Notes	This product is not intended as a life safety device.
Terms and Conditions of Sale Link here	

S1	S2	Output
On	Off	Msg1
Off	On	Msg2
On	On	Msg3

DIMENSIONS


PANEL MOUNTING




FITS PANELS UP-TO
0.25 (6.3) THICK

REAR


Note:
Common input
marked in blue

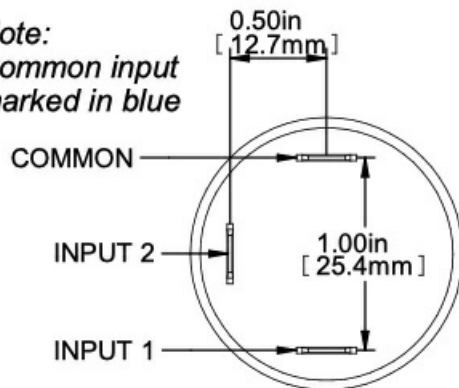


SIDE

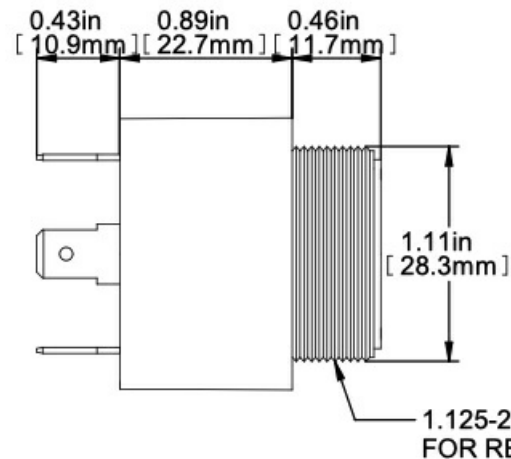

RING

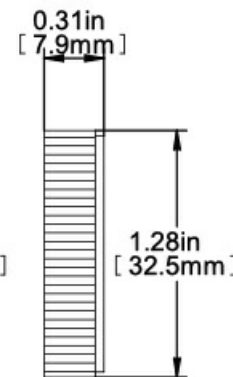

FRONT

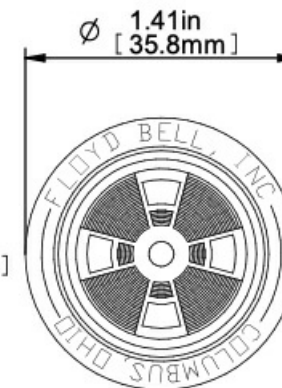

TOLERANCES ARE $\pm 0.03\text{in}$ [$\pm 0.76\text{mm}$] UNLESS OTHERWISE SPECIFIED

PANEL MOUNTING



FITS PANELS UP TO
0.25in [6.35mm] THICK

